



REV.	DESCRIPTION	DATE
A		
B		09-2006

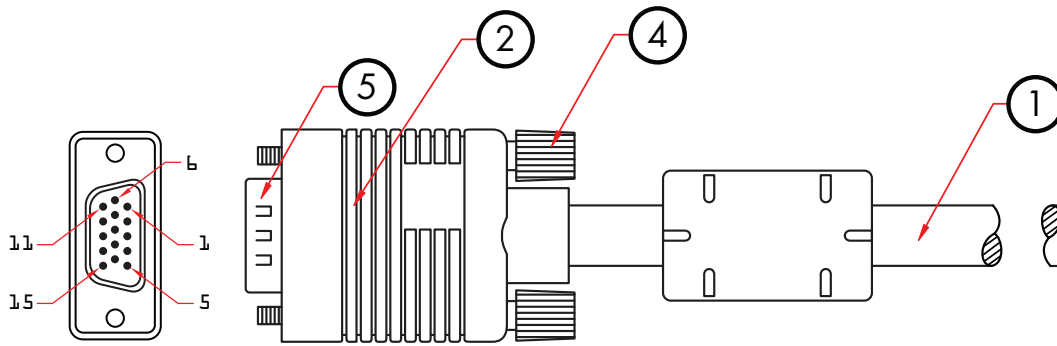

HD15 / M

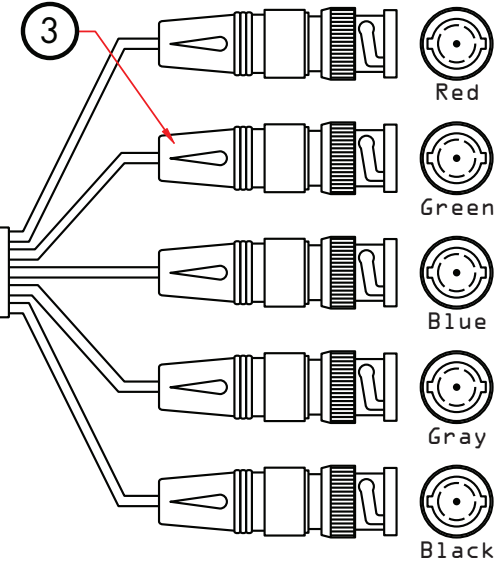

BNC x 5 / M

Pin Assignment		
HD15 Male		BNC Male
1	—	Red Center
6	●	Red Shield
2	—	Green Center
7	●	Green Shield
3	—	Blue Center
8	●	Blue Shield
13	—	Gray Center
11	●	Gray Shield
14	—	Black Center
10	●	Black Shield
4	—	
Shell	—	Shell

PART NO.	CABLE LENGTH
10H1-18101	1 ft
10H1-18106	6 ft
10H1-18110	10 ft
10H1-18115	15 ft
10H1-18125	25 ft

5	HD15 (SVGA) Male w/Gold Flash Plating Contacts. Shell Nickel Plated
4	4/40 Molded Thumbscrews
3	BNC Male Connector w/Gold Flash Plating Contacts. Shell Nickel Plated
2	Beige Molded PVD Hood, Fully Shielded w/Al-Foil
1	28AWG (7*0.12) Coax Wire*5C Shield w/Spiral Inner Jacket PVC Color: Red, Green, Blue, Gray and Black. Insulations: OD 2.5mm + Filler + Al-Mylar + Drain + Braid (85%). Outer Jacket PVC OD 9.0mm. UL2919 Approved, Beige.
NO.	SPECIFICATIONS

BOM LIST

ITEM NUMBER	10H1-181xx		DRAWER	MPD
TITLE	HD15 Male / BNC x 5 Male Video Cable		CHECKED	MAC
			APPROVED	MAC
MATERIAL		SCALE		
REV.	A	UNIT	INCH	
DRAWING NO:				

