


Construction & Material :

Item		Unit	Specification
Product			CAT-5 E STP 4P
Conductor	Size	AWG	24
	Number	Pairs	4
	Material		Solid Bare Copper
	Construction	pcs / mm	1/0.50
	Diameter	mm	0.50
Insulation	Material		HD-PE
	Min.thickness	mm	0.184
	Avg.thickness	mm	0.207
	Diameter	mm	0.96
	Color		Blue-White/Blue Orange-White/Orange Green-White/Green Brown-White/Brown
Twisting	Construction		See Cross Section
Cabling	Construction		See Cross Section
Taping	Material		Mylar
	Size	mm	0.025 x 25
	Lay Length	%	Overlap 25
	Type		Lengthways Wrapped
Drain Wire	Material		Stranded Tinned Copper
	Construction	pcs / mm	7/0.20
Shielding	Material		AL-Foil / Mylar
	Size	mm	0.038 x 25
	Lay Length	%	Overlap 25
Jacket	Material		PVC
	Min.thickness	mm	0.45
	Avg.thickness		0.55
	Overall Diameter	mm	6.00 ± 0.20
	Color		By Order
Black Marking	TYPE CM 24AWG 60 (UL) E188630 CSA LL81295 CMG, ETL VERIFIED TIA/EIA-568-B. CAT-5 E UTP Patch Cable STP		


REV.	DESCRIPTION	DATE
A		
B		02-2006

Cross Section:

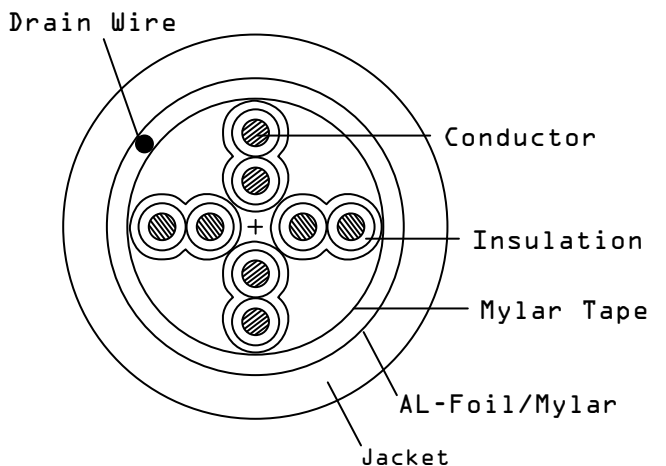

DRAWER	MPD
CHECKED	MAC
APPROVED	MAC

COLORS:	PART NUMBER:	TITLE:
Gray, Black, Orange, Purple, Green, Blue, Red, Pink, Yellow, White	10X6-5xTH	CAT-5 E STP, 24AWG, Solid



Electrical Property :

REV.	DESCRIPTION	DATE
A		
B		02-2006

Item		Unit	Specification			Standard		
D-C Resistance		Ω/100M	AT 20C			DC Max.9.3Ω		
D-C Resistance Unbalance		%	-----			Max.5		
Capacitance Unbalance		pF/100M	-----			Max.330		
Characteristic Impedance 1.0-100.0MHz		Ω/100M	-----			100 ± 15		
Dielectric Withstand		VAC/1MIN	700			No Breakdown		
Frequency MHz	Attenuation dB/100m	NEXT Pair-Pair (dB)	NEXT Power Sum (dB)	ELFEXT Pair-Pair (dB)	ELFEXT Power Sum (dB)	Structural Return Loss (dB)	Return Loss (dB)	
1	2.4	65.3	62.3	63.8	60.8	23.0	20.0	
10	7.8	50.3	47.3	43.8	40.8	23.0	25.0	
16	9.9	47.3	44.4	39.7	36.7	23.0	25.0	
20	11.1	45.8	42.8	37.7	34.7	23.0	25.0	
25	12.5	44.4	41.3	35.8	32.8	22.0	24.2	
31.25	14.1	42.9	39.9	33.9	30.9	21.1	23.3	
62.5	20.4	38.4	35.4	27.8	24.8	18.1	20.7	
100	26.4	35.3	32.3	23.8	20.8	16.0	19.0	

DRAWER	MPD
CHECKED	MAC
APPROVED	MAC
