

Product Specification


Construction & Material

REV.	DESCRIPTION	DATE
A		
B		03-2008

Part Number	Color
11F7-5271TH	Red

Item	Specification	
Product	FPLP, Fire Alarm / Security, Shielded, Plenum	
Conductor	Construction	Solid 2x14AWG
	Material	Bare Copper
Insulation	Material	Low Smoke PVC
	Min. thickness	
	Avg. thickness	0.51 mm
	Diameter	2.646 mm
Shield	Nom. Lay Length	127 mm
	Color	Black and Red
Drain Wire	Material	AL-Mylar
	Material	Solid 22AWG Tinned Copper
Jacket	Material	Low Smoke PVC
	Min. thickness	
	Avg. thickness	0.508 mm
	Diameter	6.358 mm
Color	Red	
Approximate Cable Weight		45 lbs./Kft

Cross Section: _____

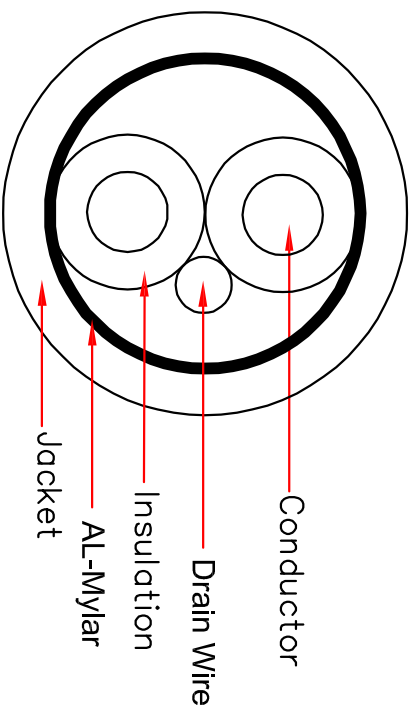

Electrical Properties:		DRAWER	LIBRA
Nom. DC Resistance per Conductor@20°C	2.52 Ohms/Kft.nom.	CHECKED	
Capacitance Between Conductors@1KHz	55 pF/ft.nom.	APPROVED	
Capacitance between Conductors to Shield 1KHz	102 pF/ft.nom.		
Operating Voltage	300 V/RMS max.		
Temperature Rating	-20 °C to 60 °C		
PART NUMBER:	TITLE:		
11F7-5271TH	2/14 Solid FPLR Shielded Plenum Pullbox, 1000 ft		

