




REV.	DESCRIPTION	DATE
A		
B		02-2006

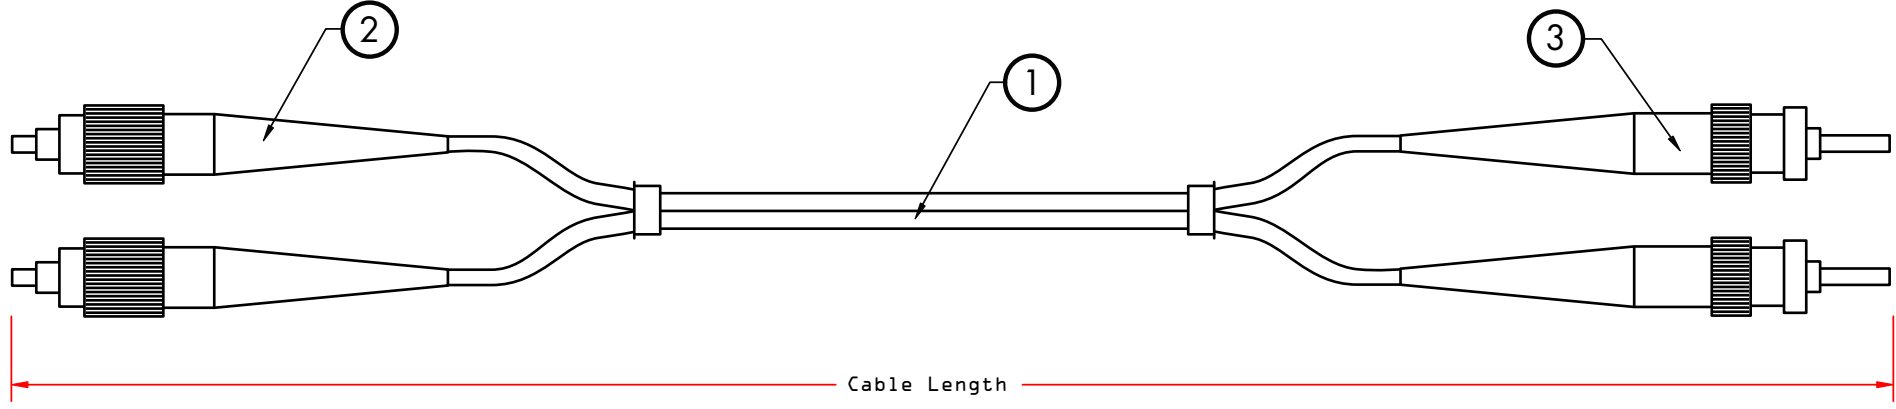

Operating Temp	-20C - 70C
Storage Temp	-40C - 70C
Insertion Loss	0.3dB
Return Loss	50dB
Length Tolerances < 5M	0 - 25cm
Length Tolerances > 5M	0 - 40cm
Repeatability	< 0.2dB
Exchangeability	< 0.2dB


PART NO.	CABLE LENGTH
FCST-11101	1 M
FCST-11102	2 M
FCST-11103	3 M
FCST-11104	4 M
FCST-11105	5 M
FCST-11107	7 M
FCST-111010	10 M

ITEM NUMBER	FCST-111xx		DRAWER	MPD
TITLE	FC to ST Multi-mode, Duplex, 62.5/125, Fiber Optic Cable		CHECKED	MAC
			APPROVED	MAC
MATERIAL		SCALE	 	
REV.	A	UNIT		INCH

3	ST Connector
2	FC Connector
1	2.8mm, Multi-mode, Duplex, 62.5/125 Fiber Cable
NO.	SPECIFICATIONS

BOM LIST	
----------	--

DRAWING NO:



888-212-8295.com