





REV.	DESCRIPTION	DATE
A		
B		02-2006

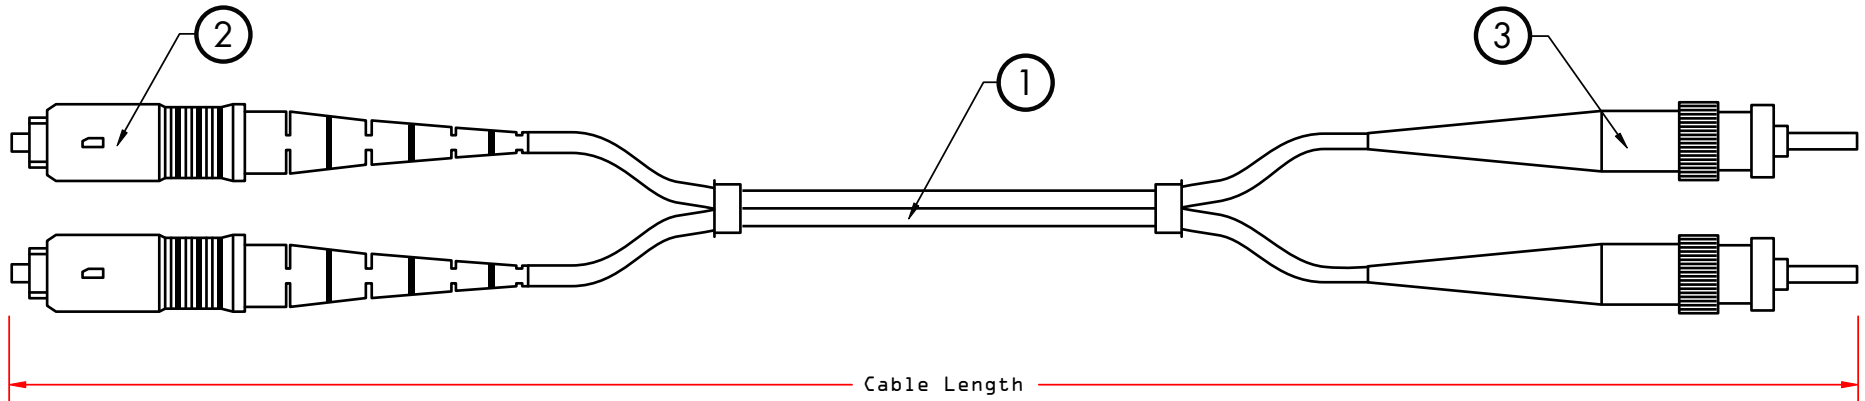

Operating Temp	-20C - 70C
Storage Temp	-40C - 70C
Insertion Loss	0.3dB
Return Loss	50dB
Length Tolerances < 5M	0 - 25cm
Length Tolerances > 5M	0 - 40cm
Repeatability	< 0.2dB
Exchangeability	< 0.2dB

PART NO.	CABLE LENGTH
SCST-11101	1 M
SCST-11102	2 M
SCST-11103	3 M
SCST-11104	4 M
SCST-11105	5 M
SCST-11107	7 M
SCST-11110	10 M

ITEM NUMBER	SCST-111xx		DRAWER	MPD
TITLE	SC to ST Multi-mode, Duplex, 62.5/125, Fiber Optic Cable		CHECKED	MAC
			APPROVED	MAC
MATERIAL		SCALE	 	
REV.	A	UNIT		INCH
DRAWING NO:			 888-212-8295.com CableWholesale	

3	ST Connector
2	SC Connector
1	2.8mm, Multi-mode, Duplex, 62.5/125 Fiber Cable
NO.	SPECIFICATIONS
	BOM LIST