


REV.	DESCRIPTION	DATE
A		
B		09-2006

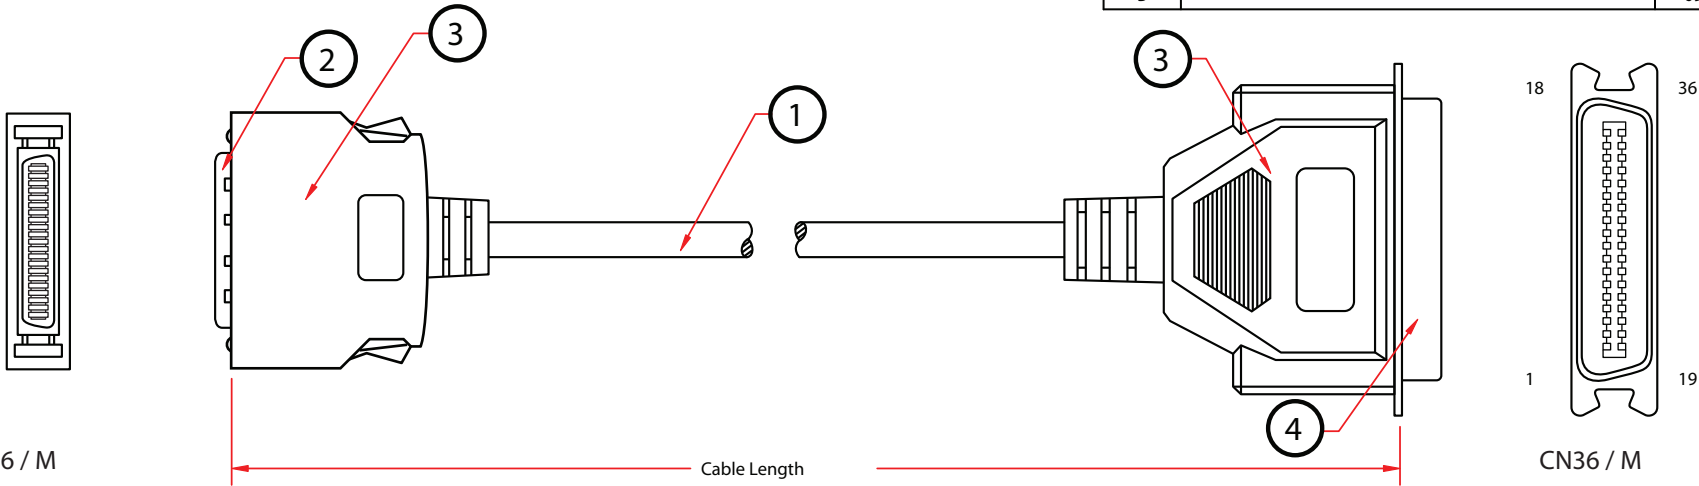

HPCN36 / M

CN36 / M

Pin Assignment			
HPCN36 / M	CN36 / M	HPCN36 / M	CN36 / M
1	11	10	6
19	35 — NC	28	24
2	13	11	7
20	28	29	25
3	10	12	8
21	33 — NC	30	26
4	32	13	9
22	29	31	27
5	12	14	31
23	34 — NC	32	15 — NC
6	2	15	1
24	20	33	19
7	3	16	36
25	21	34	30
8	4	17	14
26	22	35	17 — NC
9	5	18 — NC	16 — NC
27	23	36	18
		Shield	Shield

PART NO.	CABLE LENGTH
10E2-04106	6 ft
10E2-04110	10 ft

4	CN36 Male w/Gold Plating Contacts
3	Beige Molded PVD Hood, Fully Shielded w/AL-Foil
2	HPCN36 Male w/Gold Plating Contacts
1	IEEE-1284 18 Pair (28AWG/7*0.12) + Drain (26AWG/7*0.16) Wire, Double Shield w/AL-Foil, OD: 8.0mm, Beige Outer PVC Jacket
NO.	SPECIFICATIONS
	BOM LIST

ITEM NUMBER	10E2-041xx		DRAWER	MPD
TITLE	HPCN36 Male / CN36 Male IEEE-1284 Printer Cable		CHECKED	MAC
MATERIAL	SCALE		APPROVED	MAC
REV.	A	UNIT	INCH	
DRAWING NO:			 888-212-8295.com	